




Technical Drawings

uPVC, Couplers, bay poles & corner posts,
Synego - 80 mm frame depth




SPARWINDOWS

H-coupling (2 mm) and Statick couplin (10 mm)

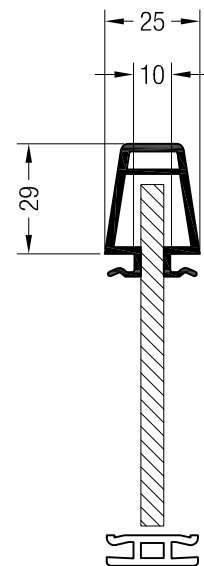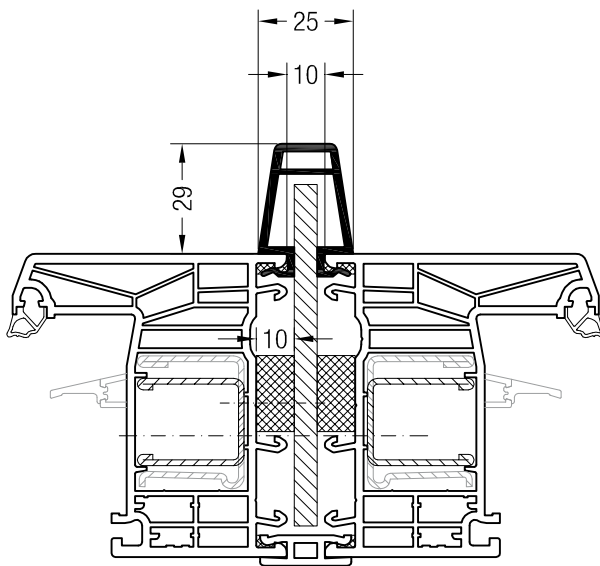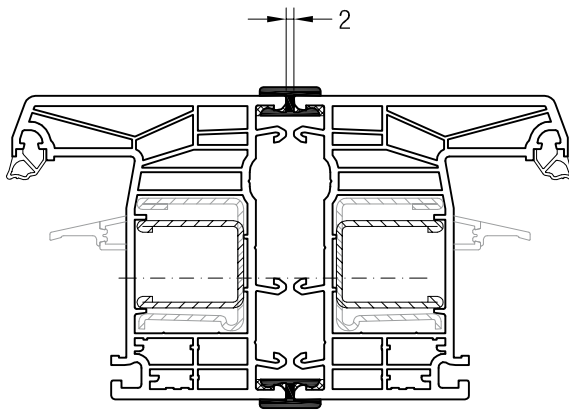


Adjustable Bay pole (90° to 180°)

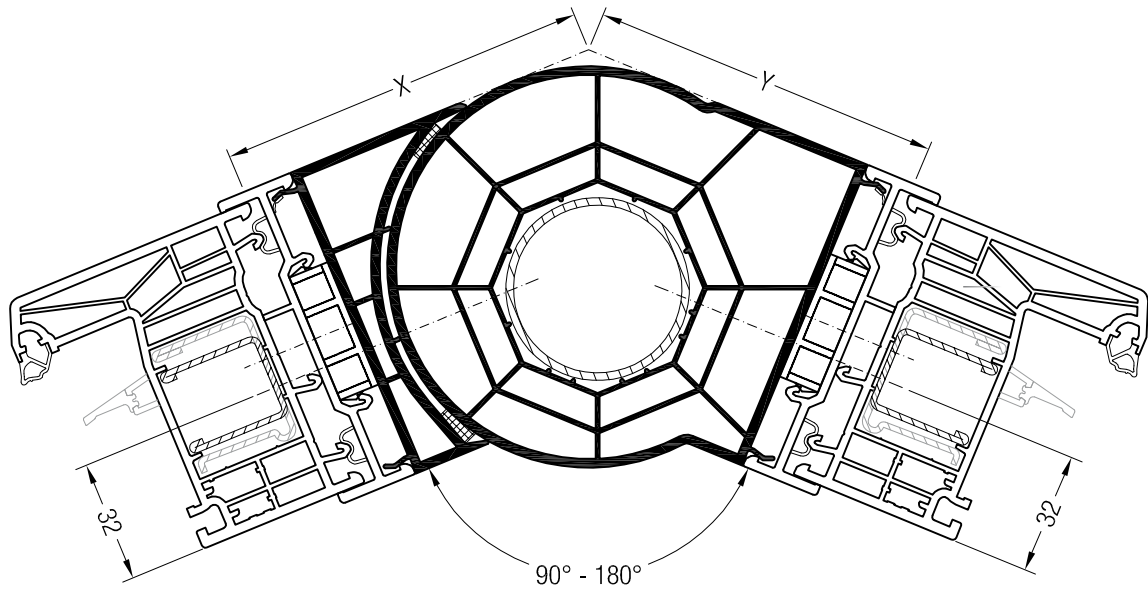

Please note: On adjustable Bay poles, the angle of the pole, will dictate the measurement of "X" and "Y" - please see the table below for the dimensions of "X" and "Y" dependent on the angle of the pole.

Angle	X mm	Y mm
180	76	71
175	78	73
170	81	75
165	83	78
160	85	80
155	88	82
150	90	85
145	93	87
140	95	90
135	98	93
130	101	95
125	104	98
120	107	101
115	110	104
110	113	108
105	117	111
100	121	115
95	125	119
90	129	124

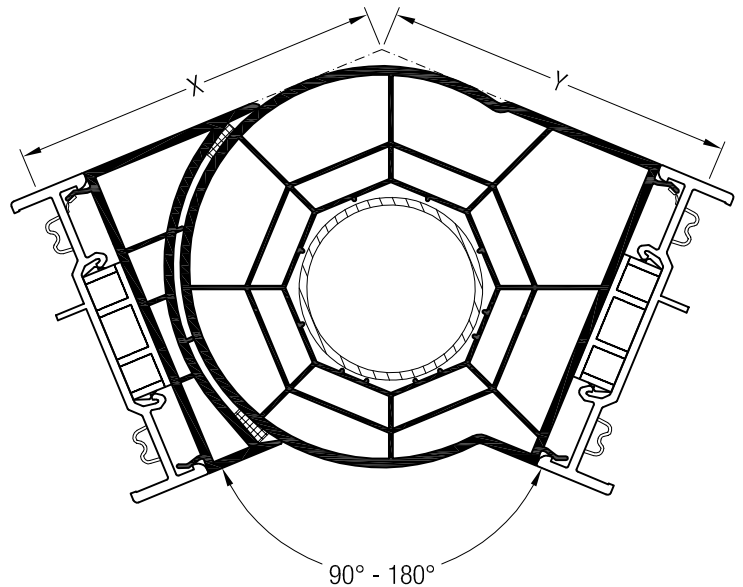

Corner post, 90° & bay pole 45°

